


ORIGINAL
HENKELMAN
vacuum systems



NATURAL PROTECTION

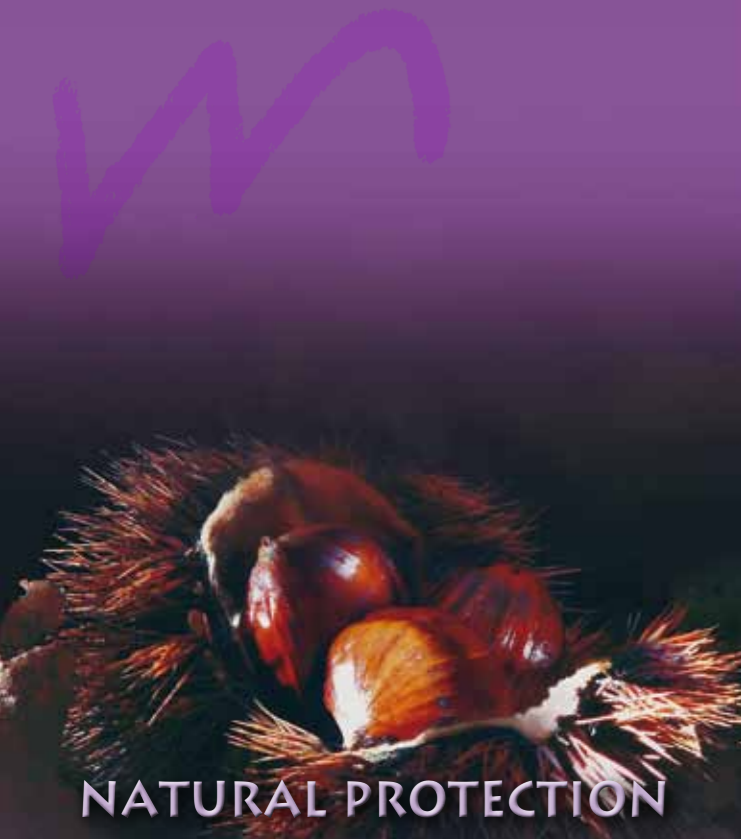

ORIGINAL
HENKELMAN
vacuum systems

Henkelman BV
PO Box 2117
5202 CC 's-Hertogenbosch
The Netherlands
Tel +31 (0)73 - 621 36 71
Fax +31 (0)73 - 622 13 18
info@henkelman.com
www.henkelman.com

Your distributor

'PURE VACUUM'
STANDS FOR HENKELMAN CLEAR DESIGN
AND HIGH PERFORMANCE
VACUUM PACKAGING TECHNOLOGY

HENKELMAN SERIES

HENKELMAN, PURE VACUUM

Henkelman specialises in the development, production and distribution of state-of-the-art vacuum packaging machines. Our leading position in the field of vacuum technology sets us apart from the competition with the largest and most varied range of solutions for the vacuum packaging of food and other products. This is why companies in all types of sectors across the world choose the reliability of Henkelman.

Our machines are 'Made in Holland'. And you can tell. They combine a tightly crafted and functional design with optimum ease of operation and a long life span. Installation is just a matter of 'plug & pack', and the smart design ensures that hygiene standards are maintained at all times.

You can be sure that your machine will be delivered quickly, thanks to Henkelman's extensive international network of authorised dealers. This network guarantees a high-quality, personalised service and a rapid, efficient response to any questions you may have.

Henkelman, pure for an optimum packaging process...

Pure Vacuum

JUMBO SERIES



JUMBO SERIES



BOXER SERIES



MARLIN SERIES



FALCON SERIES



TOUCAN SERIES




POLAR SERIES

Pure Vacuum

MINI JUMBO



MINI JUMBO




Option
H 130 mm
(high lid)

- Capacity pump 004 m³/h
- Machine cycle 25-60 sec.
- Dimensions (l x w x h) 450 x 330 x 295 mm
- Weight 25 kg
- Voltage 230V-1-50 Hz (other voltages available)
- Power 0,30 kW

JUMBO PLUS




JUMBO PLUS



Option
H 130 mm
(high lid)


- Capacity pump 008 m³/h
- Machine cycle 15-35 sec.
- Dimensions (l x w x h) 450 x 330 x 295 mm
- Weight 30 kg
- Voltage 230V-1-50 Hz (other voltages available)
- Power 0,40 kW

JUMBO 30





- Capacity pump 008 m³/h
- Machine cycle 20-40 sec.
- Dimensions (l x w x h) 525 x 450 x 370 mm
- Weight 35 kg
- Voltage 230V-1-50 Hz (other voltages available)
- Power 0,40 kW

JUMBO 35



- Capacity pump 016 m³/h
- Machine cycle 15-30 sec.
- Dimensions (l x w x h) 525 x 450 x 385 mm
- Weight 48 kg
- Voltage 230V-1-50 Hz (other voltages available)
- Power 0,55 kW

JUMBO 42



- Capacity pump 016 m³/h
- Machine cycle 20-40 sec.
- Dimensions (l x w x h) 525 x 480 x 430 mm
- Weight 56 kg
- Voltage 230V-1-50 Hz (other voltages available)
- Power 0,55 kW



UNIVERSAL TROLLEY

- Dimensions (l x w x h) 570 x 480 x 610 mm
- Swivel castors lock & brake
- Extended mobility
- Labels and pouches storage
- Optimal use of space

JUMBO SERIES

FAST AND ROBUST VACUUMPACKAGING MACHINES WITH WORLD WIDE REPUTATION

- Compact system with "Jumbo" results
- Clear added value for company and product
- Modern table models with proven packaging achievements
- Professional vacuum packaging for a attractive price
- Digital command and maintenance functions
- User friendly and low maintenance
- Easy to clean

FOOD PRODUCTS

Retail Trade - Restaurants - Catering - Supermarkets
(meat, poultry, fish, cheese, vegetables etc.)

- Longer shelf life (no contamination or bacteria's multiplication)
- Optimal product and storage hygiene (hermetically sealed)
- No loss of product (prevents drying out, moulds and freeze burn)
- Improved product quality (product maturing in packaging, no loss of aroma)
- Cost savings due to longer shelf life (larger purchasing orders, efficient cooking time spreading)
- Increased turnover due to longer shelf life (more variation and spread in product range)
- Professional product presentation
- Optimal packaging contributes to food safety and HACCP standards
- Ideal for cuisine-sous-vide applications

INDUSTRIAL PRODUCTS

Electronics - Semi-conductors - Metal - Pharmaceutical Products -
Textiles - Laboratories - Automotive - etc.

- Moisture free packaging
- Air and dust free packaging
- Volume reducing packaging
- Scrapes and scratches free solution
- Fraud resistant packaging
- Sterile and contamination free packaging



SPECIFICATIONS

GENERAL

- Table model
- Suitable for a large range of product and dimensions
- Full stainless steel conception
- Deep-drawn vacuum chamber with round corners for optimal hygiene
- Transparent lid
- Easily removable wireless sealing bars
- Insert plates for fast vacuum cycle and product adjustment
- Gentle air flow return for better product protection
- Compact budget

PACKAGING FUNCTIONS

- Vacuum
Optimal final vacuum 99,80% (2 mbar)

SEALING FUNCTIONS

- Double seal
2 x 3,5 mm convex sealing wire for product remains elimination and strong hermetic seals
- Cut-off seal
1 x 3,5 mm convex sealing wire and 1 x 1,1 mm round cut-off wire for hygienic and attractive product presentation.

OPERATIONAL CONTROL FUNCTIONS

- Time control
Command in seconds for vacuum and seal.

SUPPORT CONTROL FUNCTIONS

- STOP button for partial/full cycle interruption
- Digital maintenance program for pump
- Automatic reminder for oil replacement
- Service detection device

OPTIONAL FUNCTIONS / ACCESSORIES

- Inclined plate for efficient packing of liquid products
- Connection for external vacuuming food containers
- Service kit for standard maintenance
- Trolley with shelves and castors



■ Option ■ Standard



Pure Vacuum